



FULL MODULE UNITS - Smooth Chrome Double Griddle

BRIDGE UNIT

Pro 800

Summary

Energy :

GAZ

Code :

V03636GB

Designation :

R-G1-GRIL-DOUBLE-CHR

Dimensions (L x P x H) :
850 x 800 x 320/380 mm
Power : 22 kW (gas)
voltage/ electrical power :
1~230V+T. Weight :
160kg

APPLIANCE DESCRIPTION

General description

- Frame:

One-piece seam-welded AISI 304 stainless steel chassis, 1.5 to 3 mm thick.

- Top:

AISI 304 stainless steel top frame, 2 mm thick, with a 55 mm high edge having a 18 mm radius and return to underside.

- Legs:

No legs - To be placed on supporting structure.

- Top :

. 1 inclined smooth chrome coated steel griddle 670x570mm, 20mm thick (50µ chrome thick), with integrated splashguard.

Removable grease collector in front of the griddle.

. 2 multi-ramp enameled burners each rated 11kW, giving 2 independant heating area, controlled from 100 to 300°C by 2 thermostatic gas valves with pilot light and flame failiure safety cut-out thermocouple. Option : 100% or 50% ribbed griddle.

.

.

- Base :

. Bridge unit

Photo non contractuelle



Natural Gas Flow G20/20 :

Propane Gas Flow G31/37 :

OPTIONS

CODE

150mm wide plating shelf

V00806

100 % ribbed griddle

V03595








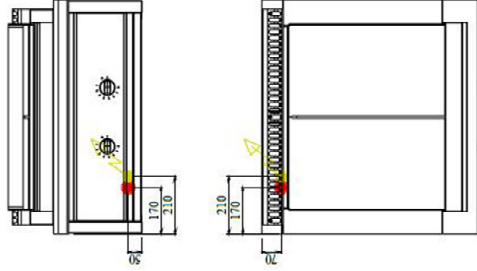
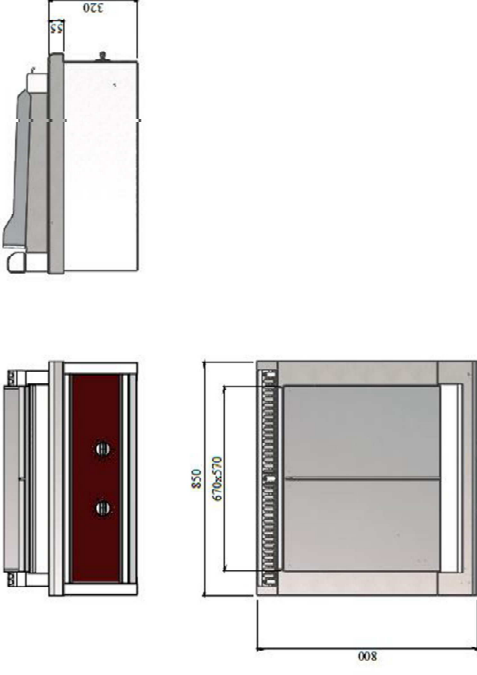

50% ribbed griddle

V03597

ACCESSORIES

CODE



 <p>Conexion gas Gas connection Gasanschluss Conexion gas</p>	 <p>Conexion electrica Electric connection Elektrische Verbindung Conexion electrica</p>	 <p>Opciones Options Aufbauten Opciones</p>	 <p>Conexion en frio Cold water connection Kaltwasseranschluss Conexion agua fria</p>	 <p>Conexion en caliente Hot water connection Warmwasseranschluss Conexion agua caliente</p>	 <p>Conexion en advance 3 bar-4h...7°F Softmax 3 bar-7°F Wasserlauf (gefällertes wasser ≤ bar-ab...7°F) Conexion agua blanda 3 bar-4h...7°F</p>	 <p>Ecoulament eaux usées sewage outflow wasserlauf desague</p>
						
						
 <p>Ø15/21 (1/2") 1~230V+T - 2.5 mm²</p> <p>V03636 PRO800-R-G1-GRIL-DOUBLE-CHR</p>						



LES AUTHENTIQUES DE LA CUISSON

CHARVET

1170 rue principale - BP3 - 38850 Charavines - FRANCE

Tél: +33 (0)4 76 06 64 22 - info@charvet.fr

www.charvet.fr



YouTube

